查询BFQ149供应商

DATA SHEET

BFQ149
PNP 5 GHz wideband transistor

Product specification
File under Discrete Semiconductors, SC14

September 1995

Philips
Semiconductors

PHILIPS

PNP 5 GHz wideband transistor BFQ149

DESCRIPTION

PNP transistor in a SOT89 envelope. It is intended for use in UHF applications such as broadband aerial amplifiers (30 to 860 MHz) and in microwave amplifiers such as radar systems, spectrum analyzers, etc., using SMD technology.

PINNING

PIN	DESCRIPTION
Code: FG	
1	emitter
2	collector
3	base



Bottom view MBK514

Fig.1 SOT89.

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{CEO}	collector-emitter voltage	open base	–	–	–15	V
I_C	DC collector current		–	–	–100	mA
P_{tot}	total power dissipation	up to T_s = 135 °C (note 1)	–	–	1	W
h_{FE}	DC current gain	I_C = –70 mA; V_{CE} = –10 V; T_j = 25 °C	20	50	–	
f_T	transition frequency	I_C = –75 mA; V_{CE} = –10 V; f = 500 MHz; T_j = 25 °C	4	5	–	GHz
G_{UM}	maximum unilateral power gain	I_C = –50 mA; V_{CE} = –10 V; f = 500 MHz; T_{amb} = 25 °C	–	12	–	dB
F	noise figure	I_C = –50 mA; V_{CE} = –10 V; R_s = 60 Ω; f = 500 MHz; T_{amb} = 25 °C	–	3.75	–	dB

LIMITING VALUES

In accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	–20	V
V_{CEO}	collector-emitter voltage	open base	–	–15	V
V_{EBO}	emitter-base voltage	open collector	–	–3	V
I_C	DC collector current		–	–100	mA
I_{CM}	peak collector current	f > 1 MHz	–	–150	mA
P_{tot}	total power dissipation	up to T_s = 135 °C (note 1)	–	1	W
T_{stg}	storage temperature		–65	150	°C
T_j	junction temperature		–	150	°C

Note

1. T_s is the temperature at the soldering point of the collector tab.

THERMAL RESISTANCE

SYMBOL	PARAMETER	CONDITIONS	THERMAL RESISTANCE
$R_{th\ j\text{-}s}$	thermal resistance from junction to soldering point	up to T_s = 135 °C (note 1)	40 K/W

Note

1. T_s is the temperature at the soldering point of the collector tab.

CHARACTERISTICS

T_j = 25 °C unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	I_E = 0; V_{CB} = –10 V;	–	–	100	nA
h_{FE}	DC current gain	I_C = –70 mA; V_{CE} = –10 V	20	50	–	
f_T	transition frequency	I_C = –70 mA; V_{CE} = –10 V; f = 500 MHz; T_{amb} = 25 °C	4	5	–	GHz
C_c	collector capacitance	I_E = 0; V_{CB} = –10 V; f = 1 MHz	–	2	–	pF
C_e	emitter capacitance	I_C = 0; V_{EB} = –0.5 V; f = 1 MHz	–	4	–	pF
C_{re}	feedback capacitance	I_C = 0; V_{CE} = –10 V; f = 1 MHz	–	1.7	–	pF
G_{UM}	maximum unilateral power gain (note 1)	I_C = –50 mA; V_{CE} = –10 V; f = 500 MHz; T_{amb} = 25 °C	–	12	–	dB
F	noise figure	I_C = –50 mA; V_{CE} = –10 V; R_s = 60 Ω; f = 500 MHz; T_{amb} = 25 °C	–	3.75	–	dB

Note

1. G_{UM} is the maximum unilateral power gain, assuming S_{12} is zero and

$$G_{UM} = 10 \log \frac{|S_{21}|^2}{\left(1 - |S_{11}|^2\right)\left(1 - |S_{22}|^2\right)} \text{dB}.$$

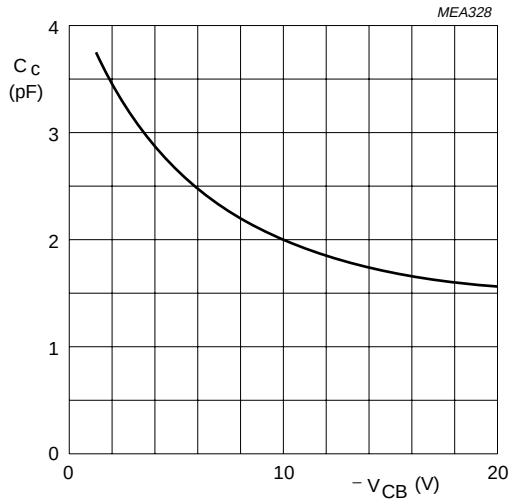

$I_E = 0$; f = 1 MHz; $T_j = 25$ °C.

Fig.2 Collector capacitance as a function of collector-base voltage.

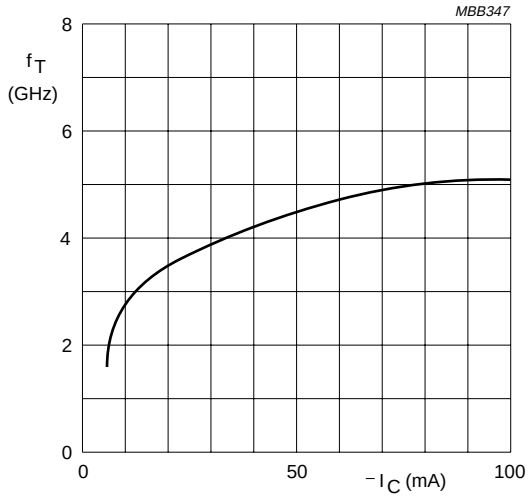

$V_{CE} = -10$ V; f = 500 MHz; $T_{amb} = 25$ °C.

Fig.3 Transition frequency as a function of collector current.

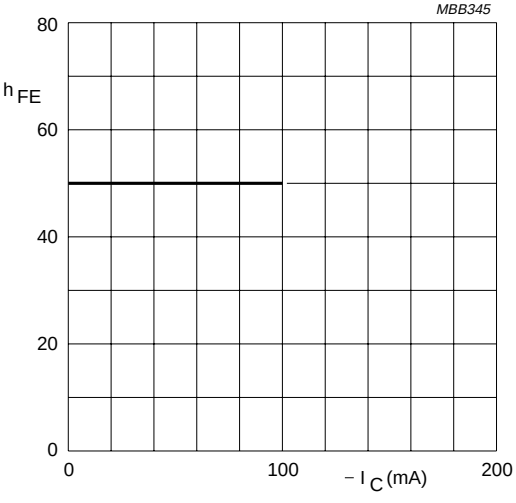

$V_{CE} = -10$ V; $T_j = 25$ °C.

Fig.4 DC current gain as a function of collector current.

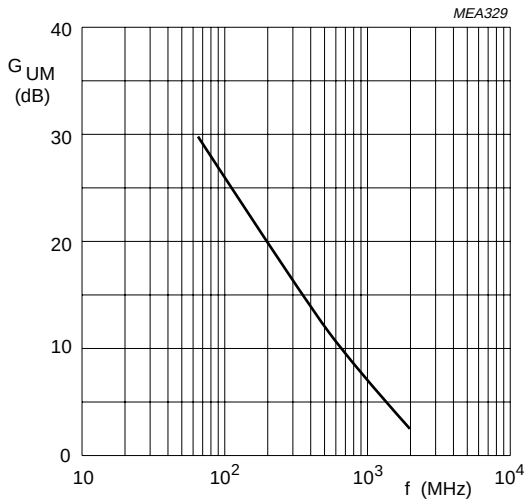

$I_c = -50$ mA; $V_{CE} = -10$ V; $T_{amb} = 25$ °C.

Fig.5 Maximum unilateral power gain as a function of frequency.

PACKAGE OUTLINE

Plastic surface mounted package; collector pad for good heat transfer; 3 leads **SOT89**

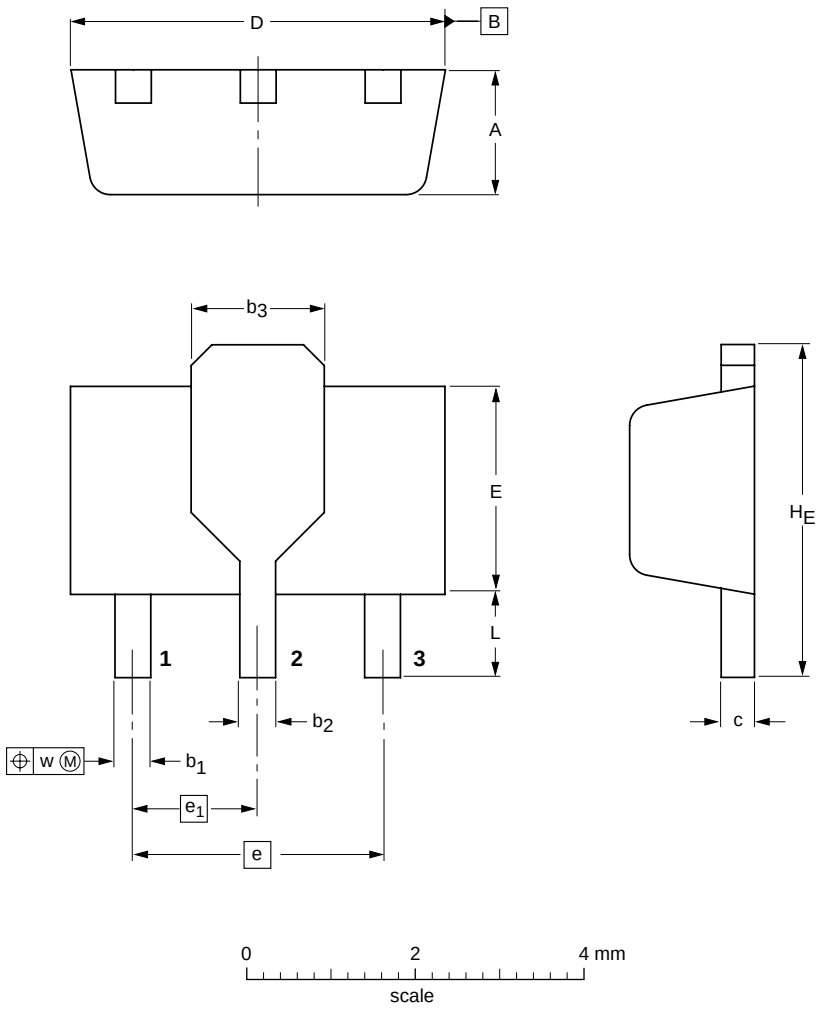

DIMENSIONS (mm are the original dimensions)

UNIT	A	b_1	b_2	b_3	c	D	E	e	e_1	H_E	L min.	w
mm	1.6 1.4	0.48 0.35	0.53 0.40	1.8 1.4	0.44 0.37	4.6 4.4	2.6 2.4	3.0	1.5	4.25 3.75	0.8	0.13

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT89						97-02-28

DEFINITIONS

Data Sheet Status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.